

# JBL® ONBEAT RUMBLE™

Quick Setup Guide



Made for




iPod iPhone iPad

## WELCOME


Thank you for purchasing the JBL® OnBeat Rumble™ speaker dock. This quick setup guide will show you how to connect and set up your dock.

## INCLUDED ITEMS


JBL OnBeat Rumble Speaker Dock

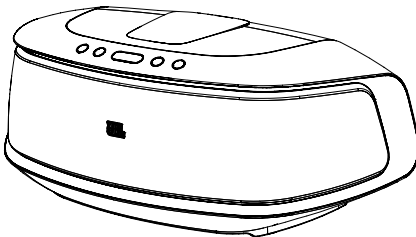


Power Supply



AC Cord (varies by region)



## CONNECTIONS

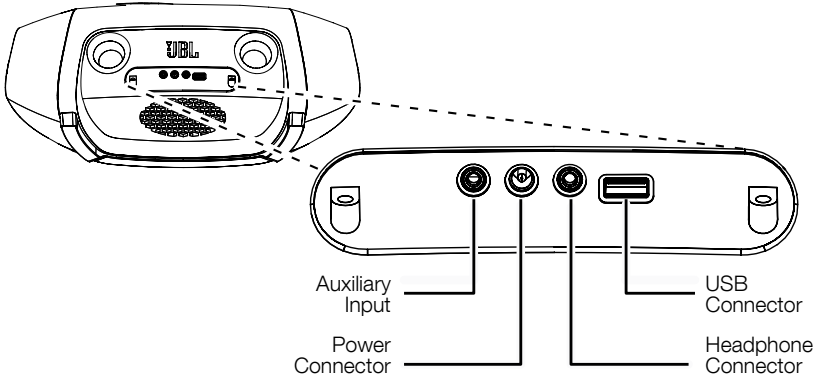


1. If you are going to use your JBL OnBeat Rumble speaker dock with another audio source, plug one end of a 3.5mm (1/8") stereo cable (not supplied) into the dock's Auxiliary Input connector, and plug the other end into the audio source's audio-out or headphone-out connector.
2. If you want to use headphones (such as when previewing mixes with a DJ app), plug them into the dock's Headphone connector.
3. Plug the dock's power supply into the Power connector on the rear of the dock and then into a working AC power outlet. The dock will automatically turn on and go into the *Bluetooth*® pairing mode (the Source button LED will be flashing blue).
4. The USB port can be used for charging your iPod, iPhone or iPad device.

## PLACEMENT

Place the JBL OnBeat Rumble speaker dock on a shelf or table with the rear of its enclosure at least 3" (76mm) away from a wall or other surface to allow the bass ports to operate properly.

## CONTROLS AND INDICATORS

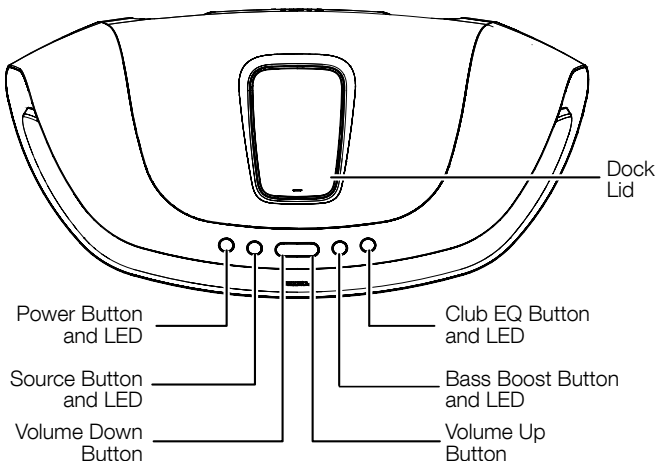

**Bass Boost button and LED:** Press this button to enhance the bass performance. The button's LED will glow when Bass Boost is on.

**Club EQ button and LED:** Press this button to toggle between two EQ mode settings: "Basic" and "Club." The Basic setting offers a stereo perspective, while the Club setting produces a high-energy, more focused sound. When the EQ is set to Club, the EQ LED will glow white.

When you are using the JBL MusicFlow app, the following additional EQ settings are available: Wider Stereo Movie, Rock Music, Jazz Music and Gaming.

**Source button and LED:** Press this button to cycle through the audio sources: *Bluetooth*, docked device and Auxiliary Input. The Source button LED will glow to indicate the active source: white for a docked device, blue for a paired *Bluetooth* device and amber for a device connected to the Auxiliary input.

- If you begin to stream audio from a paired *Bluetooth* device or play audio from a device connected to the dock while another source is playing, the dock will automatically switch to the new source.

**Power button and LED:** When the dock is on, press the Power button to put it into the standby mode. The button's LED will glow solid amber when the unit is in standby. When the dock is in standby, press the Power button to turn it on. The button's LED will glow solid white when the unit is on.


When the dock is in the standby mode, it will automatically turn on when it detects audio playing from a *Bluetooth*-connected device or from a docked device.

When the dock is on, it will automatically enter the standby mode after 10 minutes of inactivity (no audio input and no user-control operation). The button's LED will glow amber when the dock is in standby.


Note: When the dock enters the standby mode, it will also bring a docked device into standby mode.

**Volume Up/Down buttons:** Press these buttons to raise and lower the dock's volume. To mute the sound, press both buttons at the same time. (The Power button LED will flash white when the sound is muted.) To restore the sound, press either Volume button or both buttons together.

**Dock Lid:** Gently press down on the front edge of the dock lid to release it and reveal the multi-pin Lightning docking connector. To close the dock, gently push the lid back in the enclosure until it clicks.

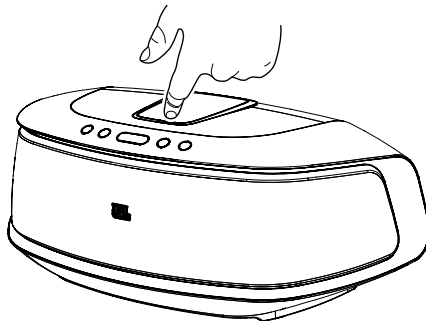

**Docking connector:** Place your device onto the Lightning connector located at the back of the docking well so that it is firmly seated on the connector.

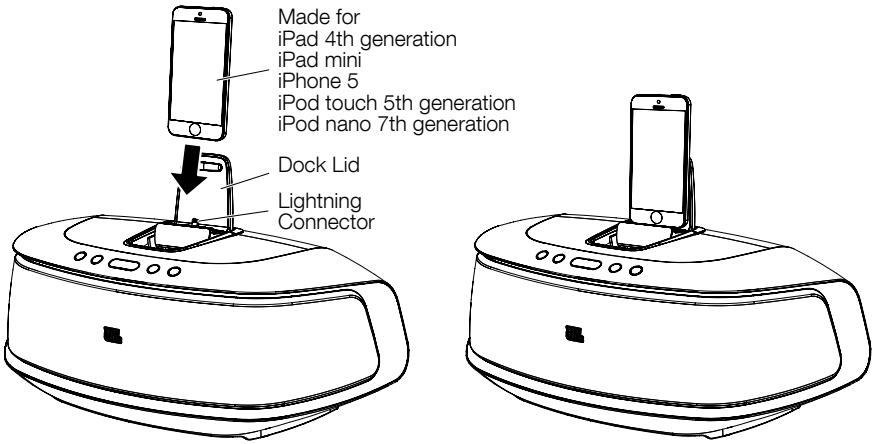

Note: We recommend that you disable the "Shake to Shuffle" feature on your iPod nano, iPod touch and iPhone before docking the device on the JBL OnBeat Rumble speaker dock.

## **BLUETOOTH WIRELESS STREAMING**

To stream audio wirelessly to the dock from a *Bluetooth*-enabled device:

1. If the dock's Source LED is not flashing blue, press the Source button until the LED begins flashing blue to indicate that the unit is in the *Bluetooth* pairing mode.
2. Place the *Bluetooth*-enabled device in the pairing mode. Use the device's *Bluetooth* pairing menu to pair with the dock. (If the device requires a pairing code, use **0000**.)
3. When the dock's Source LED glows blue continually, it is paired with the device, and you can stream audio via *Bluetooth* from the device to the dock.

To disconnect the *Bluetooth* device, press and hold the Source button. To pair the dock with a different *Bluetooth*-enabled device, repeat Steps 2 and 3 with the new device.

## APPS FOR YOUR JBL ONBEAT RUMBLE SPEAKER DOCK

In addition to the music-playback applications that come with your mobile device or tablet, the JBL MusicFlow™ app can also be used with your JBL OnBeat Rumble speaker dock. The JBL MusicFlow app is a free music player that enables you to create playlists on the fly. Similar to a jukebox, the MusicFlow app lets you queue and play songs without interruption, so you can enjoy a continuous flow of music while adding more songs or removing old ones. An album-cover interface gives you access to all your music with a sweep of your finger. Find it at the Apple App Store.


## UPGRADING FIRMWARE

You can upgrade the JBL OnBeat Rumble speaker dock's firmware from within the JBL MusicFlow app that is installed on a docked device. Follow the upgrade instructions in the app.

## SPECIFICATIONS

Low-frequency transducer:	1 x 4-1/2" (114mm) down-firing cone
High-frequency transducers:	2 x 2-1/2" (64mm) cones
Amplifier power (1% THD+N):	11W x 2 (full-range) + 28W (subwoofer)
Frequency response:	50Hz – 20kHz (–6dB)
Signal-to-noise ratio:	>75dB
<i>Bluetooth</i> transmitter frequency range:	2.402GHz – 2.480GHz
<i>Bluetooth</i> transmitter power:	0dBm ~ 20dBm (EIRP)
<i>Bluetooth</i> transmitter modulation:	GFSK/ $\pi$ /4-DQPSK/8-DPSK
Power consumption:	60W (max); <1.0W (standby, all regions except USA and EU); <0.5W (standby, USA, EU)
Power supply:	18V DC, 3.3A
Dimensions (W x H x D):	453mm x 169mm x 223mm (17-13/16" x 6-11/16" x 8-13/16")



 HARMAN International Industries, Incorporated  
8500 Balboa Boulevard, Northridge, CA 91329 USA

© 2012 HARMAN International Industries, Incorporated. All rights reserved.

JBL is a trademark of HARMAN International Industries, Incorporated, registered in the United States and/or other countries.

JBL OnBeat Rumble is a trademark of HARMAN International Industries, Incorporated.

The *Bluetooth*® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by HARMAN International Industries, Incorporated is under license. Other trademarks and trade names are those of their respective owners.

Apple, iPad, iPhone, iPod, iPod nano and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Lightning is a trademark of Apple Inc. iPad, iPod and iPhone not included. "Made for iPod," "Made for iPhone" and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPad, iPod or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.

Please note that the use of this accessory with iPad, iPod or iPhone may affect wireless performance.

Features, specifications and appearance are subject to change without notice.

Part No. JBLP3890 Rev. A